



Installation Guide for Becker Radios with CD Changer

Not for digital systems (e.g. PCM2+, COMAND)

Created: August 1, 2015

Revised: August 11, 2017

Introduction:

Many Becker radio users looking for a simply audio jack to play audio devices on the car Radio while also retaining the CD Changer will be pleased to find the AUX-BKR Adapter.

This AUX-BKR **requires and retains the external CD Changer**** to provide a 3.5mm dash mount Audio jack which can be used to connect and play all kinds of audio devices including iPod, iPhones, Smartphones, Mp3 Players on the car system without sacrificing the CD Changer.

Installation:

Warning! Although not critical, we recommend disconnecting the car battery. Keep in mind that most Becker radios are coded and will not operate without the code. Radio code must be available for radio to operate upon reconnection.

Remove radio from the dashboard to gain access to the connectors. A pair of special removal tools (See **Fig. 1**) is required to remove the Becker radio.



Fig. 1

Radio removal Tools

1. To remove radio, slide tools into slots to detent position. Withdraw the radio by pulling outwards. See **Fig. 2**

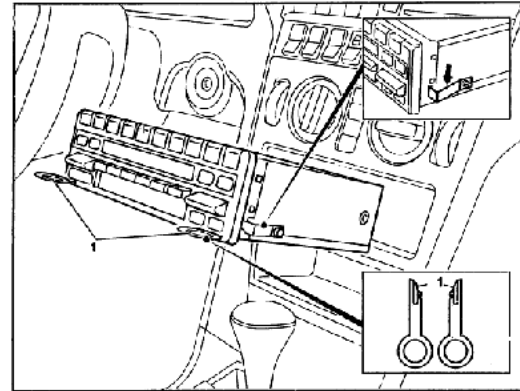


Fig. 2

2. With radio removed separate and disconnect the green and blue plugs (C-2 & C-3) from Radio connector (See **Fig. 3**)

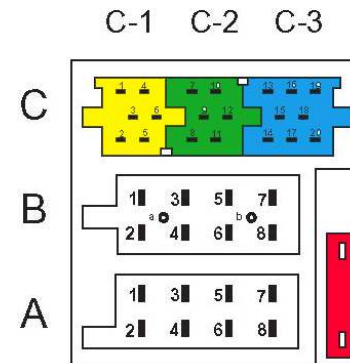


Fig. 3

Becker Radio Connectors

Warning! The C-1 slot (yellow) for vehicles with amplifier.

3. Connect Blue plug removed in step 2 to the 8-pin (black) connector on adapter harness (See **Fig. 4**).



Fig. 4
harness connector

4. Mate the Blue ISO plug from Adapter harness to the Green plug removed from radio in step 2 and reconnect to radio (See **Fig. 5**)



Fig. 5
mating plugs

5. Carefully route the audio jack (See **Fig. 6**) to a location on the dash or nearby panel where it will be mounted (within

3.5 ft.). This location will vary based on vehicle and customer's preference.



Fig. 6
Audio Jack

6. Drill a 1/4" at mounting location on the dash etc., push the aux jack threaded end through the hole and secure with nut (See **Fig.7**)



Fig. 7

Warning! Should you decide to secure the jack to dashboard etc. make sure the panel is 1/8" thick or less to allow threads on the jack to protrude and engage the nut. (If necessary use a dremel or sander to thin the panel). Drilling a hole to secure the jack is not necessary but doing so makes for a stock appearance and easier to plug/unplug the audio device.

Test Operation

1. Use included 3.5mm audio cable (See **Fig. 8**) to connect audio device to the jack



Fig. 8

3.5mm male to male cable

2. Press the CD or unique set of buttons on Radio to enter CD Changer Mode. Radio display will change to Track or Disc numbers (**CD Changer will play but not heard.**)
3. Select a track on audio device. Selected track will play on the car stereo.

Warning! Playlist and Track selection is ***NOT*** possible from the radio. You must use the Audio device built-in controls to access music files.

4. Use radio volume knob to adjust playback level
Note: if playback is distorted, lower volume on audio device.
5. To listen to the CD Changer, simply **disconnect audio device from the jack** and operate Changer as customary.
6. If correct operation is confirmed go ahead and reinstall Radio

Important Notes:

The AUX-BKR works on **any factory installed Becker Radio** in BMW, Land Rover, Mercedes, Porsche, Ferrari etc. and aftermarket Becker Radios (e.g. Grand Prix, Indianapolis, Cascade pro etc.) **with analog CD CHANGERS. Not applicable to Fiber CD Optic CD Changer applications (e.g. PCM2+, COMAND etc.)**

Plug and play installation to Becker Radio with CD Changer in less than 10 minutes. No wire cutting or splicing.

**** External or remote CD Changer refers to the optional Changer installed on the lower dash, center armrest, hatch, trunk etc. (external CD Changer is not the Changer built-into the head unit)**

Disclaimer

- This product has no affiliation with Porsche, Becker etc.
- There are no warranties expressed or implied by purchase of this product
- We're not liable for misuse of this product.
- We recommend professional installation.

Call 804-717-5717 or email support@discountcarstereo.com

© 1995-17 Discount Car Stereo, Inc. All rights reserved. Information in this document is subject to change without notice. Other products and companies referred to herein are trademarks or registered trademarks of their respective companies or mark holders.