


Secure the 2 battery positive cables and the direct lead to the starter motor solenoid.

1. Tighten to 12 Nm (9 lb.ft).
2. Tighten to 8 Nm (6 lb.ft).

4. Secure the starter motor wiring harness clip.

5. Install the fuel line support bracket.

- Tighten to 8 Nm (6 lb.ft).

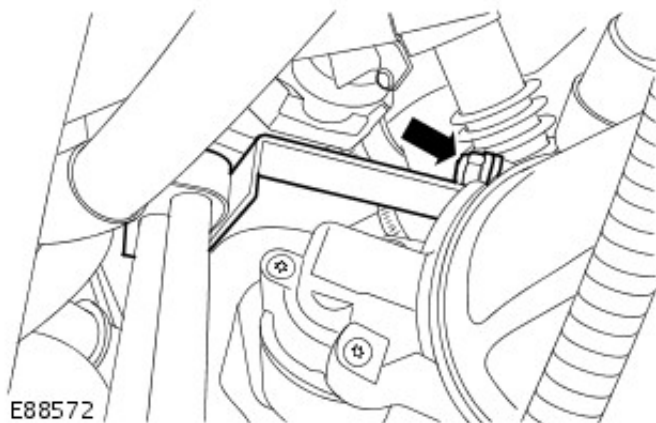

6. Connect the battery ground cable.

For additional information, refer to: [Battery Connect](#) (414-01 Battery, Mounting and Cables, General Procedures).