




9. Using a suitable tie strap, secure the rear driveshaft to the chassis.

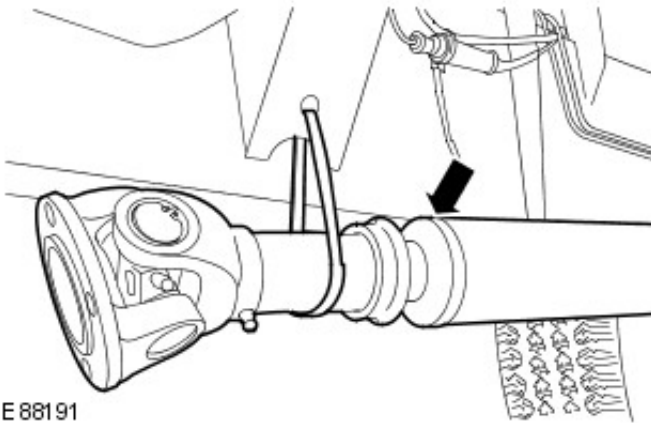

10. Disconnect the electronic speedometer electrical connector from the transfer case.

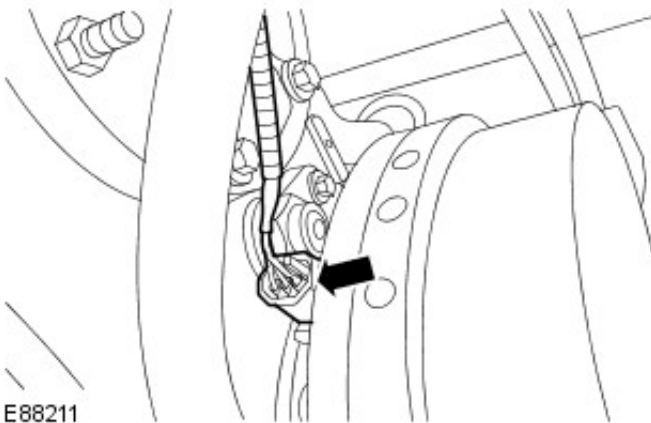

11. Disconnect the LH earth cable from the transfer case.
  - Remove the nut.

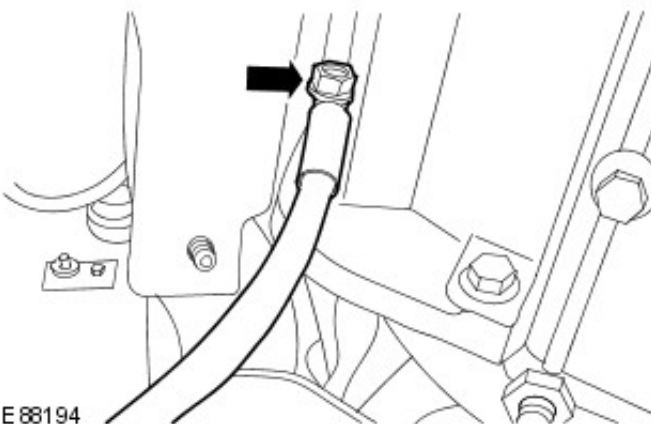

12. Disconnect the RH earth cables from the transfer case.
  - Remove the bolt.