

PUBLISHED: 11-MAY-2011
2011.0 RANGE ROVER (LM), 417-01

EXTERIOR LIGHTING

HEADLAMP ASSEMBLY (G1224384)

REMOVAL

**WARNING:**

Vehicles fitted with Xenon headlamps, the following precautions must be observed. Failure to comply may result in exposure to ultra violet rays, severe electric shock, burns or the risk of explosion. Ensure the headlamps are switched off at all times. Eye and hand protection must be worn. Never switch on the lamps or test the bulbs with the lamp holder released from the headlamp.

**NOTES:**


- Removal steps in this procedure may contain installation details.
- The ignition must be switched off.
- Right-hand shown, left-hand similar.

1. Disconnect the battery ground cable.

Refer to: [Specifications](#) (414-00 Battery and Charging System - General Information, Specifications).


2. Refer to: [Front Bumper Cover](#) (501-19 Bumpers, Removal and Installation).

- 3.

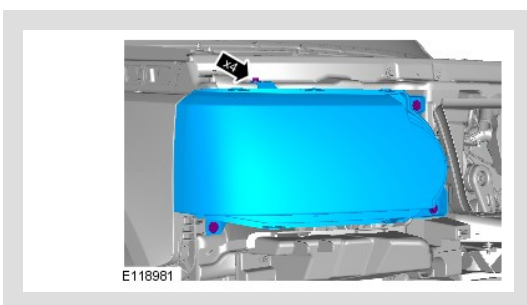

Torque: 4 Nm

- 4.

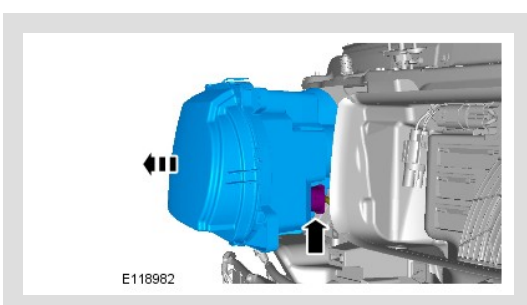

INSTALLATION

1. To install, reverse the removal procedure.