

PUBLISHED: 04-FEB-2013  
2011.0 RANGE ROVER (LM), 303-01A

ENGINE – TDV8 4.4L DIESEL

# INTAKE MANIFOLD PLENUM CHAMBER (G1313558)




## REMOVAL


1. Refer to: [Engine Cover - TDV8 4.4L Diesel](#) (501-05 Interior Trim and Ornamentation, Removal and Installation).
2. Refer to: [Plenum Chamber](#) (412-01A Air Distribution and Filtering, Removal and Installation).

3. **⚠ CAUTION:**


Make sure that all openings are sealed. Use new blanking caps.

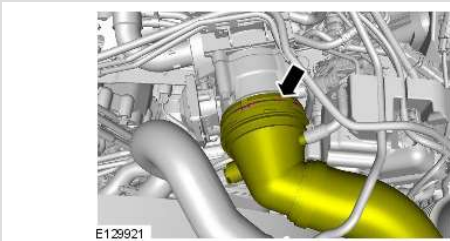

4.

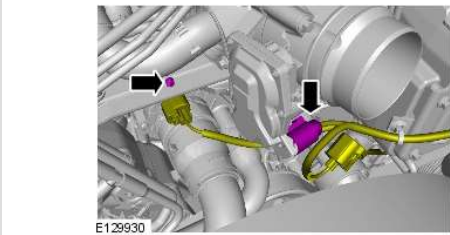

5.

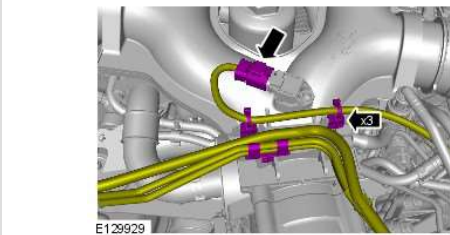


6.




#### NOTES:

- Remove and discard the gasket.
- Install a new gasket.

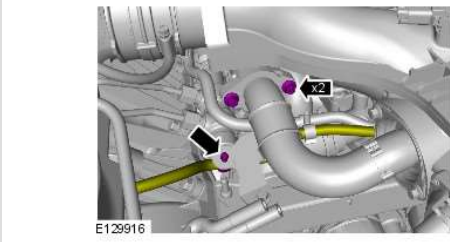


*Torque: 10 Nm*

7.

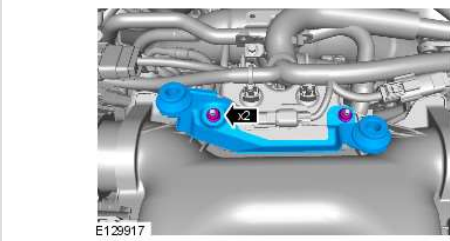

*Torque: 10 Nm*

8.

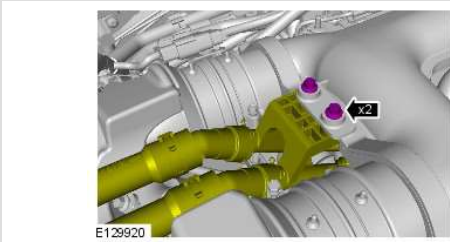


*Torque: 10 Nm*

9.


**⚠ CAUTION:**

Take extra care not to damage the component.

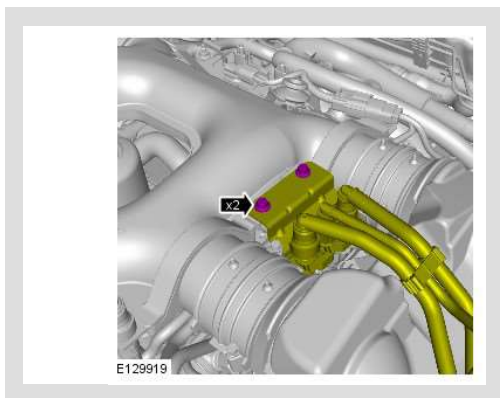


*Torque: 10 Nm*


10.

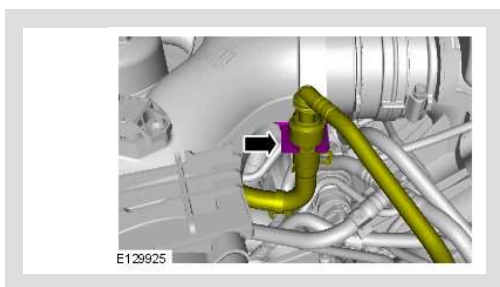

11.

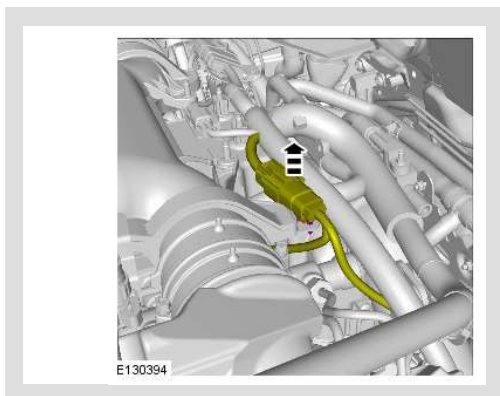


12.

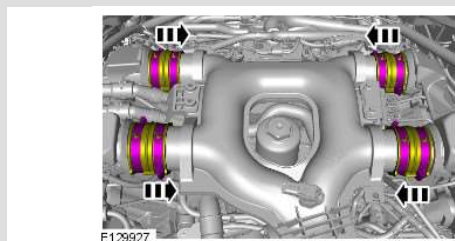

*Torque: 4 Nm*

13.

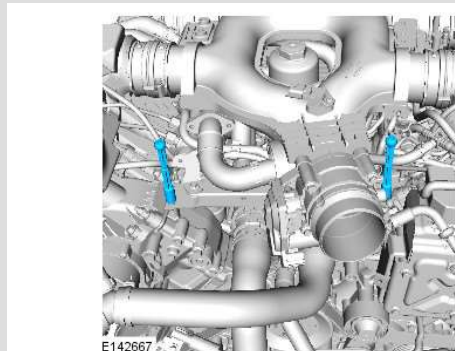


*Torque: 2 Nm*

14.

**⚠ CAUTION:**

Make sure that all openings are sealed. Use new blanking caps.

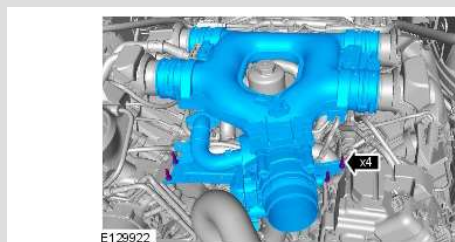

*Torque: 10 Nm*


15.

**⚠ CAUTION:**

Make sure that all openings are sealed. Use new blanking caps.

**△ NOTE:**

Do not disassemble further if the component is removed for access only.

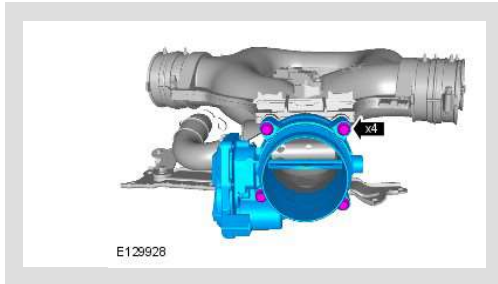


*Torque: 12 Nm*


16.

**⚠ CAUTION:**

Make sure that all openings are sealed. Use new blanking caps.

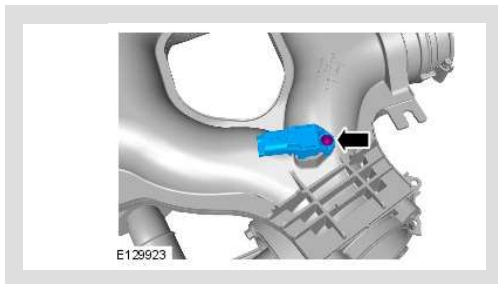


17.

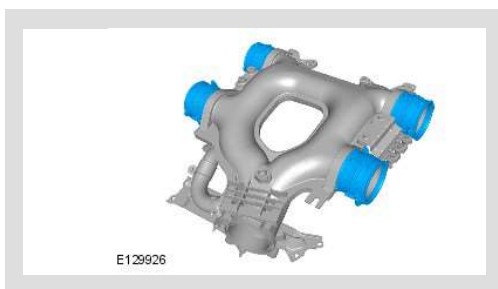

18.


**⚠ CAUTION:**

Make sure that all openings are sealed. Use new blanking caps.

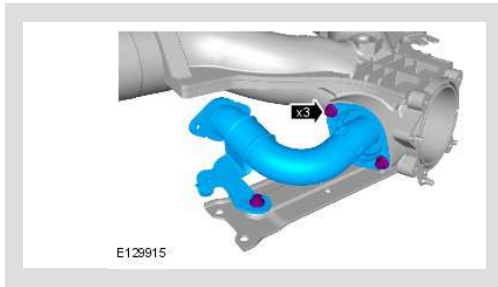

*Torque: 10 Nm*

19.

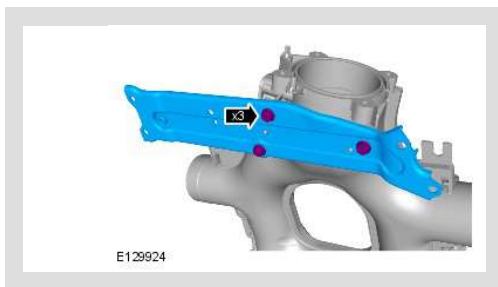

*Torque: 10 Nm*

## INSTALLATION

1. To install, reverse the removal procedure.