


M700859

8. Release cable tie securing harness to differential.
9. Release 3 cable ties securing harness to chassis longitudinal.
10. Disconnect sensor multiplug.
11. Remove harness and sensor assembly.

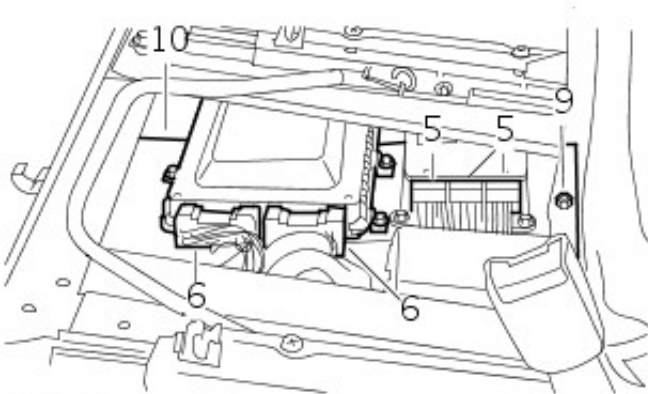

M700865

Installation

1. Position harness and sensor assembly to vehicle and connect multiplug.
2. Apply grease to both sensors.

3.  **CAUTION:** Ensure sensors are thoroughly cleaned before fitting.

Carefully install both sensors to hub assemblies.

4. Secure harness to axle and differential with cable ties.
5. Secure harness to axle with clips.
6. Secure harness to chassis with cable ties.
7. Install both back plates to hub assemblies and secure with bolts.
8. Install rear wheels and tighten to 130 Nm (95 lbf.ft).
9. Lower vehicle.