



Electronic Engine Controls - 2.4L Duratorq-TDCi HPCR (103kW/140PS) - Puma - Cylinder Head Temperature (CHT) Sensor

Removal and Installation


| Special Tool(s) | |
|--|-------------------------------|
|  303680 | Socket, CHT Sensor 303-680 |

Removal

1. Remove the engine cover.
For additional information, refer to: [Engine Cover](#) (501-05 Interior Trim and Ornamentation, Removal and Installation).
2. Disconnect the cylinder head temperature (CHT) sensor.

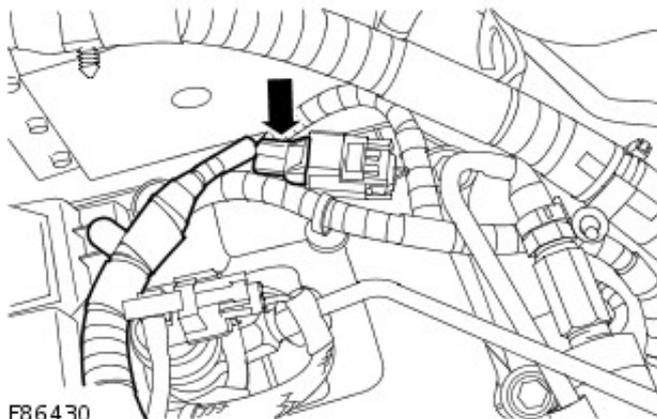

3. Release the CHT sensor wiring harness.

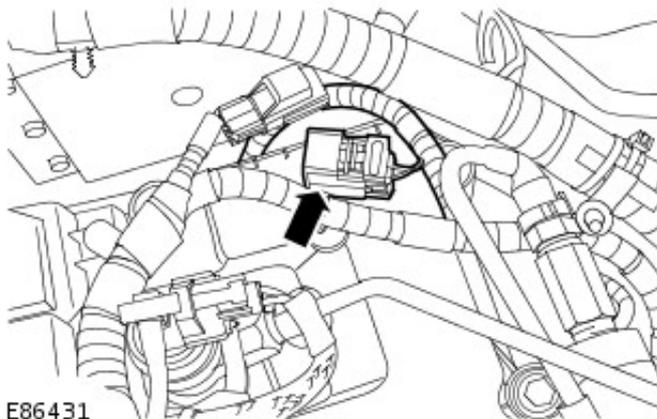

4. Using the special tool, remove the CHT sensor.

